

# TECHNICAL DATASHEET

ELECTRICAL SPECIFICATIONS

Item No. 757.006 / Page 1 / 4

Print Date 29.12.2025 11:41

## DC-Converter 757-27-SDB4

600 Watt, isolated, single output buck-boost converter with internal decoupling diode

All parameters defined on Ta=25°C, IoNom = 22.0 ADC and UiNom = 48VDC

### ABSOLUTE MAXIMUM RATINGS

| parameter                                             | unit | typ   |
|-------------------------------------------------------|------|-------|
| Input peak voltage                                    | VDC  | 75.00 |
| Feedback protection against overvoltage on the output | VDC  | 35    |
| Worst case output voltage in fault mode               | VDC  | 39    |
| Output overvoltage protection                         | VDC  | 35.0  |

### THERMAL CHARACTERISTICS

| parameter                                        | min to max    | typ    |
|--------------------------------------------------|---------------|--------|
| Ambient temperature range                        | -40°C / +85°C |        |
| Max. case temperature for thermal shut down [°C] |               | +90°C  |
| Storage temperature (device not in operation)    | -10°C / +65°C |        |
| Relative maximum humidity under storage          |               | 75% RH |
| Storage under worst conditions [in days]         |               | 25     |

### COMMUNICATION INTERFACE

| parameter                                           | unit | fulfilled | conditions | min to max  |
|-----------------------------------------------------|------|-----------|------------|-------------|
| Option shut down (left open for operation)          |      | ✓         |            |             |
| Shutdown voltage for transformer                    | VDC  |           | IoNom      | -0.2 to 2.8 |
| Option Switch high (left open for normal operation) |      | ✓         |            |             |
| Switch high control voltage for transformer         | VDC  |           | IoNom      | -0.2 to 0.2 |

### SPECIALS

| parameter                                | unit | fulfilled | conditions    | typ                     |
|------------------------------------------|------|-----------|---------------|-------------------------|
| Switching frequency                      | kHz  |           |               | 130                     |
| Efficiency at light loads                | %    |           | 0.25IoNom     | 96.00                   |
| Efficiency at medium loads               | %    |           | 0.5IoNom      | 95.00                   |
| Efficiency at full loads                 | %    |           | IoNom         | 94.00                   |
| MTTF                                     | h    |           | SN29500 @ 70° | 1 100 000               |
| For active loads or parallel connection  |      | ✓         |               |                         |
| Drives high capacitive loads             |      | ✓         |               |                         |
| CC/CV battery load characteristic        |      | ✓         |               |                         |
| Coupling capacitance input to output     | nF   |           |               | transformer winding onl |
| Insulation strength primary to secondary | VDC  |           |               | 2100                    |
| Insulation strength primary to case      | VDC  |           |               | 2100                    |

### COMPLIANCE

| parameter                                                    | fulfilled | notes |
|--------------------------------------------------------------|-----------|-------|
| 61000-6-2 (EMC-Immunity standard for industrial environment) | ✓         |       |
| 61000-4-2 (immunity against ESD-electrostatic discharge)     | ✓         |       |

All technical and general information is provided in all conscience. However, completeness and accuracy cannot be guaranteed. Demke recommends to fully test the product in its determined application. Due to permanent improvements to our products, we reserve the right to change specifications at any time and without prior notification and without obligation to update products already supplied. This is a component for professional equipment manufacturers. Read the safety and installation instruction for proper use. Safety aspect and EMC-aspect must be considered in the end application.

**DEMKE**  
ELECTRONIC

Demke Electronic GmbH  
Tonhallestrasse 37  
9500 Wil - Switzerland

phone +41 71 511 34 00  
e-mail sales@demke-electronic.com

web www.demke-electronic.com

# TECHNICAL DATASHEET

ELECTRICAL SPECIFICATIONS

Item No. 757.006 / Page 2 / 4

Print Date 29.12.2025 11:41

## DC-Converter 757-27-SDB4

600 Watt, isolated, single output buck-boost converter with internal decoupling diode

|                                                                 |   |           |
|-----------------------------------------------------------------|---|-----------|
| 61000-4-3 (immunity High frequency electromagnetic fields)      | ✓ |           |
| 61000-4-4 (immunity against burst – electrical fast transients) | ✓ |           |
| 61000-4-5 (immunity against surge - high energy surges)         | ✓ |           |
| 61000-4-6 (immunity against induced, conducted disturbances)    | ✓ |           |
| 61000-6-4 (EMC – Emission standard for industrial environment)  | ✓ |           |
| 55022<A                                                         | ✓ |           |
| 50155                                                           | ✓ | ready for |

All technical and general information is provided in all conscience. However, completeness and accuracy cannot be guaranteed. Demke recommends to fully test the product in its determined application. Due to permanent improvements to our products, we reserve the right to change specifications at any time and without prior notification and without obligation to update products already supplied. This is a component for professional equipment manufacturers. Read the safety and installation instruction for proper use. Safety aspect and EMC-aspect must be considered in the end application.

**DEMKE**  
ELECTRONIC

Demke Electronic GmbH  
Tonhallestrasse 37  
9500 Wil – Switzerland

phone +41 71 511 34 00  
e-mail sales@demke-electronic.com

web [www.demke-electronic.com](http://www.demke-electronic.com)

## DC-Converter 757-27-SDB4

600 Watt, isolated, single output buck-boost converter with internal decoupling diode

### INPUT

| parameter                                    | unit  | conditions  | min | typ  | max |
|----------------------------------------------|-------|-------------|-----|------|-----|
| Input voltage range                          | VDC   | IoNom       | 19  | 48   | 70  |
| No load input current                        | mA    | UiNom       |     | 60   |     |
| Max. input current                           | A     | UiNom       |     | 35   |     |
| Input start up voltage                       | VDC   | UiNom       |     | 19.0 |     |
| Undervoltage lockout                         | VDC   | UiNom       |     | 17.5 |     |
| Input quiescent current in shutdown mode     | mA    | UiNom       |     | 3.00 |     |
| Generated AC-ripple on the supply (BW=20MHz) | mVp-p | UiNom/IoNom |     | 200  |     |
| Generated HF-noise on the supply (BW=20MHz)  | mVp-p | UiNom/IoNom |     | 30   |     |

### OUTPUT

| parameter                                                    | unit  | conditions  | min | typ        | max |
|--------------------------------------------------------------|-------|-------------|-----|------------|-----|
| Output voltage                                               | VDC   | IoNom       |     | 27.0       |     |
| No Load output voltage increase                              | %     | UiNom       |     | 2          |     |
| Minimum required load to obtain the specified output voltage | %     | UiNom       |     | 0          |     |
| Generated AC-ripple on the output (BW=20MHz)                 | mVp-p | UiNom/IoNom |     | 90         |     |
| Generated HF-noise on the output (BW=20MHz)                  | mVp-p | UiNom/IoNom |     | 30         |     |
| Output voltage accuracy                                      | %     | IoNom       |     | +/-2.00%   |     |
| Output voltage overshoot at initial switch-on                | %     | IoNom       |     | overdamped |     |
| Rated output power                                           | W     |             |     | 600        |     |

### CONTROL

| parameter                                               | unit | conditions         | min | typ      | max |
|---------------------------------------------------------|------|--------------------|-----|----------|-----|
| Static line regulation                                  | %    | IoNom/UiMin...UiMa |     | 0.01     |     |
| Static load regulation                                  | %    | IoMin...IoMax/UiNo |     | 5.0      |     |
| Dynamic load change adjusting time                      | ms   | LoadChange 10...90 |     | 1.00     |     |
| Dynamic load change deviation to nominal output voltage | V    | LoadChange 10...90 |     | 1.00     |     |
| Maximum admissible capacitive load                      | uF   | IoNom              |     | infinite |     |
| Initial switch on time                                  | ms   | IoNom              |     | 270      |     |
| Softstart ramp up time                                  | ms   | IoNom              |     | 30       |     |
| Restart time after undervoltage lockout                 | ms   | IoNom              |     | 270      |     |

All technical and general information is provided in all conscience. However, completeness and accuracy cannot be guaranteed. Demke recommends to fully test the product in its determined application. Due to permanent improvements to our products, we reserve the right to change specifications at any time and without prior notification and without obligation to update products already supplied. This is a component for professional equipment manufacturers. Read the safety and installation instruction for proper use. Safety aspect and EMC-aspect must be considered in the end application.

# TECHNICAL DATASHEET

ELECTRICAL SPECIFICATIONS

Item No. 757.006 / Page 4 / 4

Print Date 29.12.2025 11:41

## DC-Converter 757-27-SDB4

600 Watt, isolated, single output buck-boost converter with internal decoupling diode

### MECHANICAL

| parameter          | unit |            |
|--------------------|------|------------|
| Overall dimensions | mm   | 130x130x27 |
| Weight             | g    | 900        |


| Pin No. | Function | Electrical Determination | Colour | Cross-              | Cable length |
|---------|----------|--------------------------|--------|---------------------|--------------|
| 1       | Vi+      | Input voltage positive   | red    | 6 mm <sup>2</sup>   | 300 mm       |
| 2       | Vi-      | Input voltage negative   | black  | 6 mm <sup>2</sup>   | 300 mm       |
| 3       | SD       | Shut down                | blue   | 2.5 mm <sup>2</sup> | 300 mm       |
| 4       | SH       | Switch high              | white  | 2.5 mm <sup>2</sup> | 300 mm       |
| 5       | Vo-      | Output voltage negative  | black  | 6 mm <sup>2</sup>   | 300 mm       |
| 6       | Vo+      | Output voltage positive  | red    | 6 mm <sup>2</sup>   | 300 mm       |

### Mechanical dimensions and Pin configuration

All dimensions in mm

Connector type: cable

Case: FMC 130x130x28

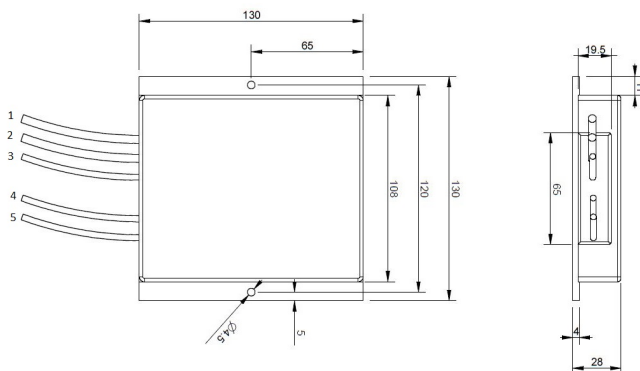

All technical and general information is provided in all conscience. However, completeness and accuracy cannot be guaranteed. Demke recommends to fully test the product in its determined application. Due to permanent improvements to our products, we reserve the right to change specifications at any time and without prior notification and without obligation to update products already supplied. This is a component for professional equipment manufacturers. Read the safety and installation instruction for proper use. Safety aspect and EMC-aspect must be considered in the end application.

**DEMKE**  
ELECTRONIC

Demke Electronic GmbH  
Tonhallestrasse 37  
9500 Wil - Switzerland

phone +41 71 511 34 00  
e-mail sales@demke-electronic.com

web [www.demke-electronic.com](http://www.demke-electronic.com)